

# IVS1, IVS2, IVSR1, IVSR2




Revised  
08/04/08


## Integrated Ventilation System

1/1


## PLANNING GUIDE

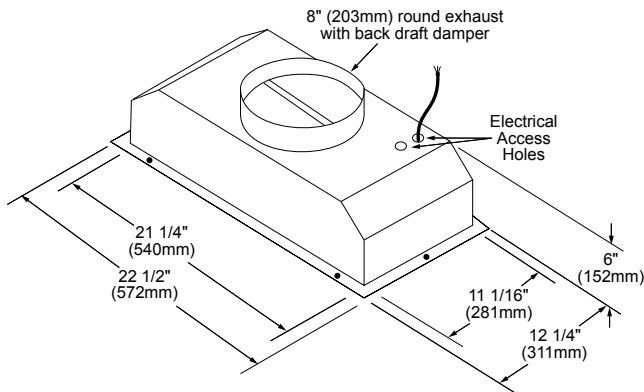


**IVS1/IVSR1 OVERALL DIMENSIONS**

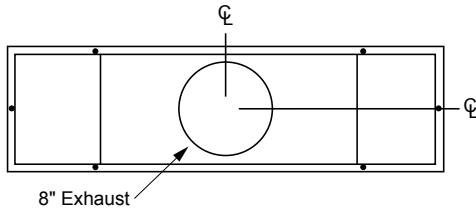


**IVS1/IVSR1 OVERALL DIMENSIONS**  
(Top View)

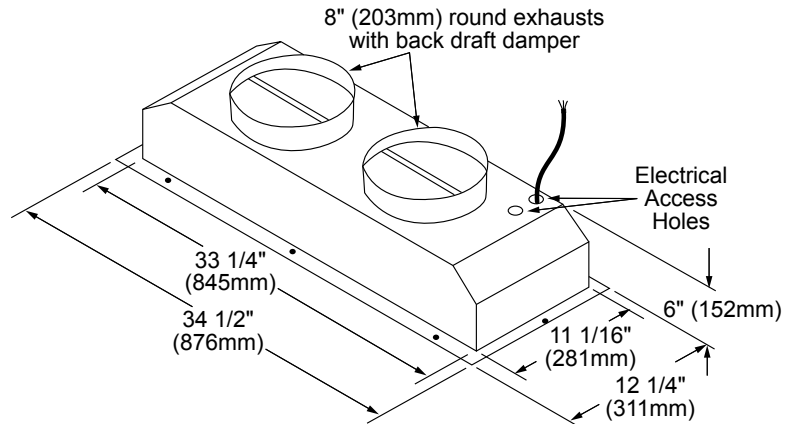

**IVS2/IVSR2 OVERALL DIMENSIONS**

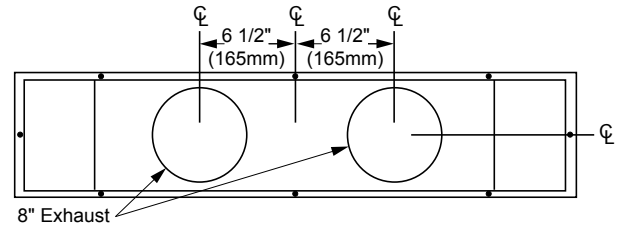

**IVS2/IVSR2 OVERALL DIMENSIONS**  
(Top View)

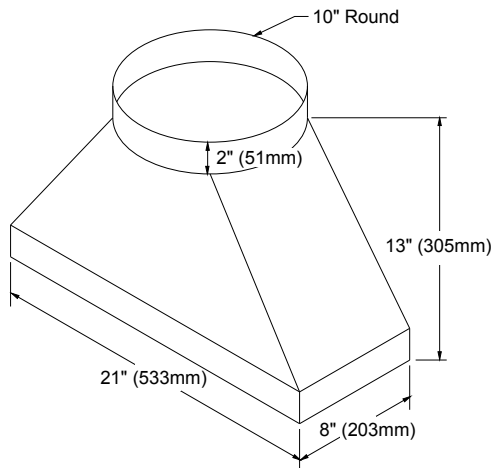

**ATD10 OVERALL DIMENSIONS**  
(For use with IVS2 and IVSR2)



### NOTES:

1. An internal blower is included with model IVS1 and IVS2. Blower Ratings: 1200CFM for IVS2 and 600CFM for IVS1.
2. Remote blower is required for IVSR1/IVSR2 models.
3. The ATD10 is sold separately.

Model No.	Dedicated Circuit Required	Maximum Duct Length	Total Connected Load	Approximate Shipping Weight
IVS1	120 Vac, 60 Hz, 15 Amp Min. grounded, dedicated circuit	Maximum 60 Equivalent Straight Feet	0.2 kW (2 Amp)	25 lbs.
IVSR1			0.2 kW (1.5 Amp)*	21 lbs.
IVS2			0.4 kW (3 Amp)	38 lbs.
IVSR2			0.2 kW (1.5 Amp)*	29 lbs.

\*Does not include remote blower